




MODEL TE-8C-MD



MODEL TE-8S-MD



MODEL TE-10K-MD

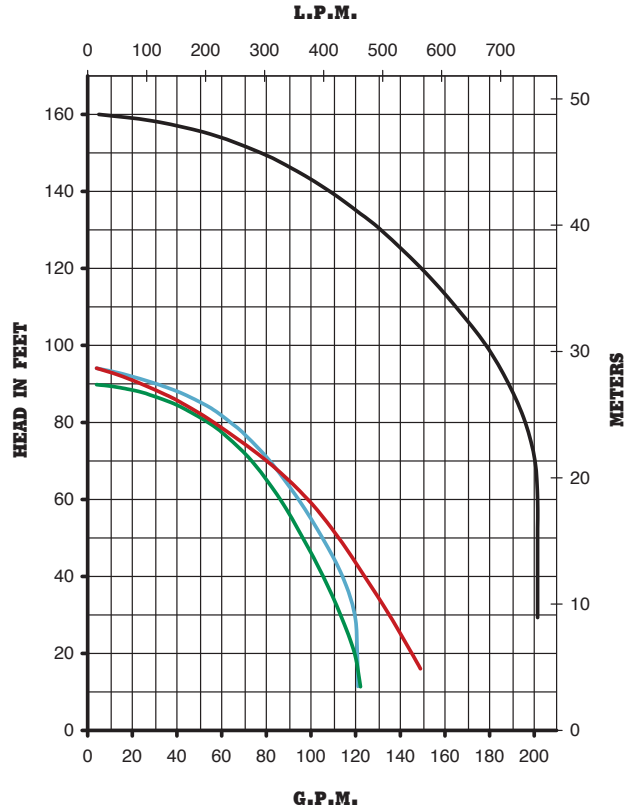

SERIES 8 & 10

SERIES 8 & 10	TE-8C-MD	TE-8K-MD	TE-8S-MD	TE-8C-MD-HF	TE-8K-MD-HF	TE-10K-MD
Max Flow	120 GPM	120 GPM	120 GPM	150 GPM	150 GPM	200 GPM
Max Head	95 Feet	95 Feet	90 Feet	95 Feet	95 Feet	160 Feet
Inlet	2" MPT	2" MPT	2" MPT	2" MPT	2" MPT	3" MPT
Outlet	1 1/2" MPT	1 1/2" MPT	1 1/2" MPT	1 1/2" MPT	1 1/2" MPT	2" MPT
HP	3	3	5	5	5	10
RPM	3450	3450	3450	3450	3450	3450
Volts	230/460	230/460	230/460	230/460	230/460	230/460
Phase	3	3	3	3	3	3
Amps	7.8 3.9	7.8 3.9	12.6 6.3	12.6 6.3	12.6 6.3	22.8 11.4
Motor Type	TEFC	TEFC	TEFC	TEFC	TEFC	TEFC
Elec. Connect.	Conduit Box	Conduit Box	Conduit Box	Conduit Box	Conduit Box	Conduit Box
Max Int. Press.	50 PSI	75 PSI	200 PSI	50 PSI	75 PSI	75 PSI
Max Liquid Temp.	190 F	200 F	250 F	190 F	200 F	190 F
Weight Packed	160 lbs.	160 lbs.	180 lbs.	170 lbs.	170 lbs.	260 lbs.
Materials in Contact	Polypropylene, Carbon Filled Kynar, Viton, Teflon/Ryton/Carbon Bushing, Ceramic *	Carbon Filled Kynar, Ceramic, Viton, Carbon Bushing *	316 Stainless Steel, Viton, Ceramic, Carbon Bushing	Polypropylene, Carbon Filled Kynar, Viton, Teflon/Ryton/Carbon Bushing, Ceramic	Carbon Filled Kynar, Ceramic, Viton, Carbon Bushing	Carbon Filled Kynar, Ceramic, Viton, Carbon Bushing

*Available with 5HP Motor