


MODEL 320CP-MD, MODEL 851 Dual Head, MODEL 140



MODEL 335CP-MD, MODEL 802 Dual Head

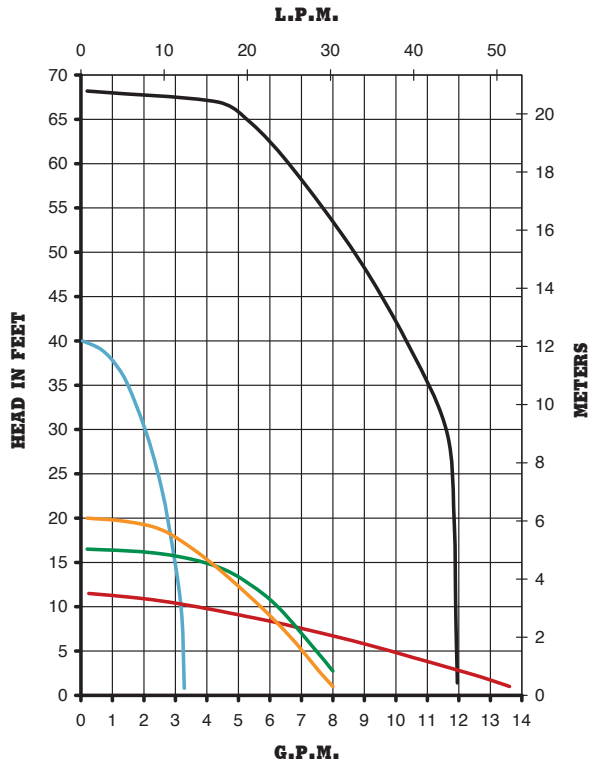

320, 335, 140, 802, 851

SERIES 320, 335, 140, 802, 851	320CP-MD	335CP-MD	140	802 Dual Head	851 Dual Head
Max Flow	3.3 GPM	12 GPM	12.5 GPM	8 GPM	8 GPM
Max Head	40 Feet	68 Feet	11.5 Feet	16.5 Feet	20 Feet
Inlet	1/2" MPT	3/4" MPT	1 1/8" OD	1/2" OD	5/8" OD
Outlet	3/8" MPT	3/4" MPT	7/8" OD	1/2" OD	5/8" OD
HP	1/12	1/3	1/20	1/8	1/8
RPM	3450	3450	3450	3450	3450
Volts	115 or 230	115/230 230/460	115 or 230	230	230
Phase	1	1 or 3	1	1	1
Amps	1.75 .75	4.4/2.2 1.2/0.6	1.3 .69	.84	.79
Motor Type	Air Cooled	TEFC	Air Cooled	Air Cooled	Air Cooled
Elec. Connect.	Cord	Conduit Box	Leads	Leads	Leads
Max Int. Press.	50 PSI	50 PSI	50 PSI	50 PSI	50 PSI
Max Liquid Temp.	190 F	190 F	190 F	190 F	190 F
Weight Packed	10 lbs.	21 lbs.	6 lbs.	10.5 lbs.	12 lbs.
Materials in Contact	Polypropylene, Ceramic, Viton *	Polypropylene, Ceramic, Viton *	Polypropylene, Buna N, Ceramic Magnet, Ceramic	Polypropylene, Kynar Carbon Filled, Ryton/Teflon/Carbon, Ethylene Propylene, Ceramic Magnet, 316 Stainless Steel	Polypropylene, Viton, Ceramic Magnet, Ceramic

*Smooth Inlet/Outlet available