



**MODEL TE-5.5C-MD-AC**




**MODEL TE-5.5C-MD**



**MODEL TE-5.5S-MD**



**MODEL TE-6T-MD**

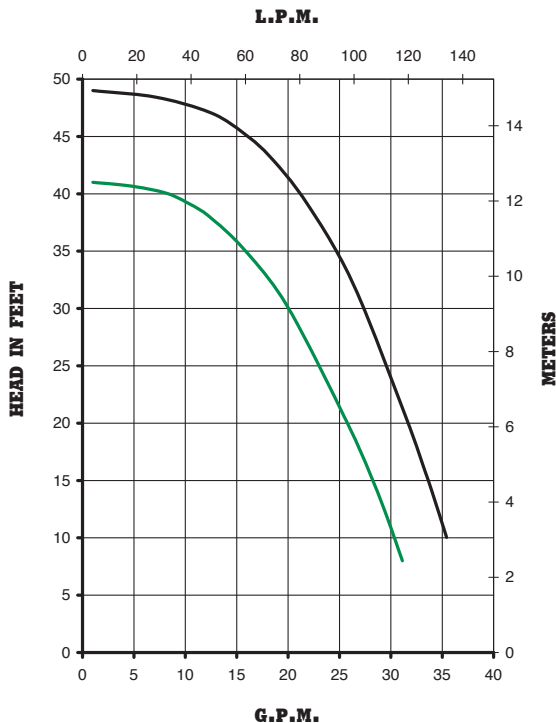

# SERIES 5.5 & 6

SERIES 5.5 & 6	TE-5.5C-MD	TE-5.5K-MD	TE-5.5S-MD	TE-6T-MD	TE-6K-MD
<b>Max Flow</b>	30 GPM	30 GPM	30 GPM	38 GPM	38 GPM
<b>Max Head</b>	41 FT	41 FT	41 FT	49 FT	49 FT
<b>Inlet</b>	1" FPT	1" FPT	1" FPT	1" FPT	1" FPT
<b>Outlet</b>	3/4" MPT	3/4" MPT	3/4" MPT	3/4" MPT	3/4" MPT
<b>HP</b>	1/3	1/3	1/3	1/2	1/2
<b>RPM</b>	3450	3450	3450	3450	3450
<b>Volts</b>	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460
<b>Phase</b>	1 or 3	1 or 3	1 or 3	1 or 3	1 or 3
<b>Amps</b>	1 (4.4/2.2) 3 (1.2/.6)	1 (4.4/2.2) 3 (1.2/.6)	1 (4.4/2.2) 3 (1.2/.6)	1 (7.4/3.7) 3 (1.5/.7)	1 (7.4/3.7) 3 (1.5/.7)
<b>Motor Type</b>	TEFC	TEFC	TEFC	TEFC	TEFC
<b>Elec. Connect.</b>	Conduit Box	Conduit Box	Conduit Box	Conduit Box	Conduit Box
<b>Max Int. Press.</b>	50 PSI	75 PSI	200 PSI	50 PSI	75PSI
<b>Max Liquid Temp.</b>	190 F	200 F	250 F	190 F	200 F
<b>Weight Packed</b>	34.5 lbs.	35 lbs.	39 lbs.	34.5 lbs.	34.5 lbs.
<b>Materials in Contact</b>	Polypropylene, Ceramic, Viton *	Kynar, Ceramic, Viton *	316 Stainless Steel, Viton, Ceramic, Carbon Bushing	Polypropylene, Ryton, Ceramic, Viton, Teflon/ Ryton/Carbon Bushing **	Kynar, Ceramic, Viton, Carbon Bushing **

\*Air Cooled motor available  
\*\*Drip Proof motor available