



MODEL MDXT-3




MODEL MDX-MT3



MODEL MDX-3-1/2



MODEL TE-MDK-MT3

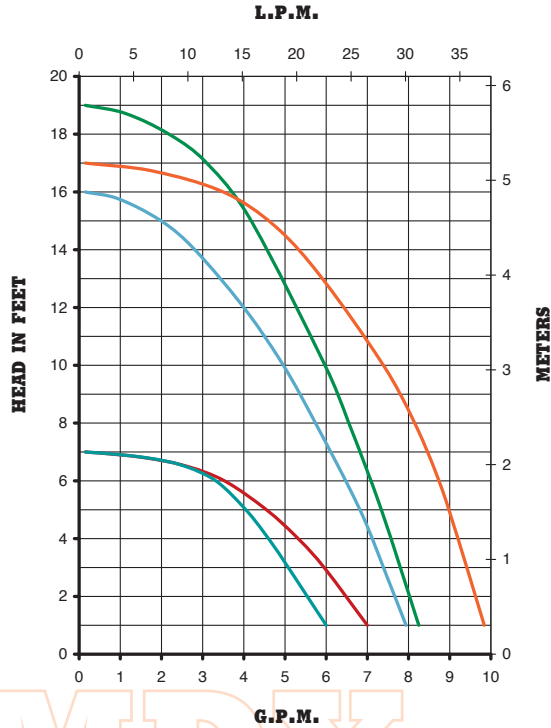

SERIES MDX	MDX-1/2	MDX-5/8	MDXT
Max Flow	6 GPM	6 GPM	7 GPM
Max Head	7 Feet	7 Feet	7 Feet
Inlet	1/2" OD	5/8" OD	1/2" FPT
Outlet	1/2" OD	5/8" OD	3/8" MPT
HP	1/55	1/55	1/55
RPM	1750	1750	1750
Volts	115 or 230	115 or 230	115 or 230
Phase	1	1	1
Amps	.94 .45	.94 .45	.94 .45
Motor Type	Air Cooled	Air Cooled	Air Cooled
Elec. Connect.	Cord	Cord	Cord
Max Int. Press.	50 PSI	50 PSI	50 PSI
Max Liquid Temp.	190 F	190 F	190 F
Weight Packed	5.5 lbs.	5.5 lbs.	5.5 lbs.
Materials in Contact	Polypropylene, Kynar, Buna N, Ceramic Magnet	Polypropylene, Kynar, Buna N, Ceramic Magnet	Polypropylene, Ceramic Shaft & Thrust Washer, Buna N, Ceramic Magnet



SERIES MDX	MDXT-3	MDX-3 1/2	MDX-3 5/8	MDX-MT3	MDK-MT3	TE-MDX-MT3	TE-MDK-MT3
Max Flow	8.5 GPM	8.5 GPM	8.5 GPM	8 GPM	8 GPM	10 GPM	10 GPM
Max Head	19 Feet	19 Feet	19 Feet	16 Feet	16 Feet	17 Feet	17 Feet
Inlet	1/2" FPT	1/2" OD	5/8" OD	1/2" MPT	1/2" MPT	1/2" MPT	1/2" MPT
Outlet	3/8" FPT	1/2" OD	5/8" OD	1/2" MPT	1/2" MPT	1/2" MPT	1/2" MPT
HP	1/25	1/25	1/25	1/25	1/25	1/15	1/15
RPM	3450	3450	3450	3450	3450	3450	3450
Volts	115 or 230	115 or 230	115 or 230	115 or 230	115 or 230	115 or 230	115 or 230
Phase	1	1	1	1	1	1	1
Amps	1.55 .7	1.55 .7	1.55 .7	1.35 0.85	1.35 0.85	1.0 / .5	1.0 / .5
Motor Type	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled	TEFC	TEFC
Elec. Connect.	Cord	Cord	Cord	Cord	Cord	Conduit Box	Conduit Box
Max Int. Press.	50 PSI	50 PSI	50 PSI	75 PSI	75 PSI	75 PSI	75 PSI
Max Liquid Temp.	190 F	190 F	190 F	200 F	200 F	200 F	200 F
Weight Packed	6 lbs.	6 lbs.	6 lbs.	6.5 lbs.	6.5 lbs.	10 lbs.	10 lbs.
Materials in Contact	Polypropylene, Ceramic Shaft & Thrust Washer, Buna N, Ceramic Magnet	Polypropylene, Kynar, Ryton/ Teflon/Carbon, Stainless Steel, Buna N, Ceramic Magnet	Polypropylene, Kynar, Ryton/ Teflon/Carbon, Stainless Steel, Buna N, Ceramic Magnet	Ryton, Ceramic, Viton	Kynar, Ceramic, Viton	Ryton, Ceramic, Viton	Kynar, Ceramic, Viton