



FRX 75-SP

3/4" x 3/4" Self Priming Centrifugal Pump

Model FRX 75-SP is a high performance self-priming 316 stainless steel centrifugal pump. The pump is ideal for marine, industrial, agricultural or commercial applications where suction lift is required.

The FRX 75-SP model features all 316 stainless steel components for superior corrosion resistance when pumping chemical compounds. A carbon / ceramic / Viton bellows shaft seal is standard. Ports are 3/4" NPT with a 1/8" NPT fill port. The FRX 75-SP model is capable of 12 foot suction lift (3450 rpm). Marine ignition protected motors available.

SPECIFICATIONS:

Suction and Discharge . . . 3/4" NPT x 3/4" NPT

Materials of Construction 316 stainless steel

Flow Up to 21 GPM

Head Feet Up to 23'

Impeller 316 stainless steel semi-open

Drive Options Close coupled 115V AC

 Close coupled 12V DC

 Close coupled 230V AC

 Close coupled 24V DC

Seal Special seals upon request


 Standard - carbon / ceramic / Viton



Application:





- Agricultural
- Commercial
- Industrial
- Marine
- OEM


FRX 75-SP

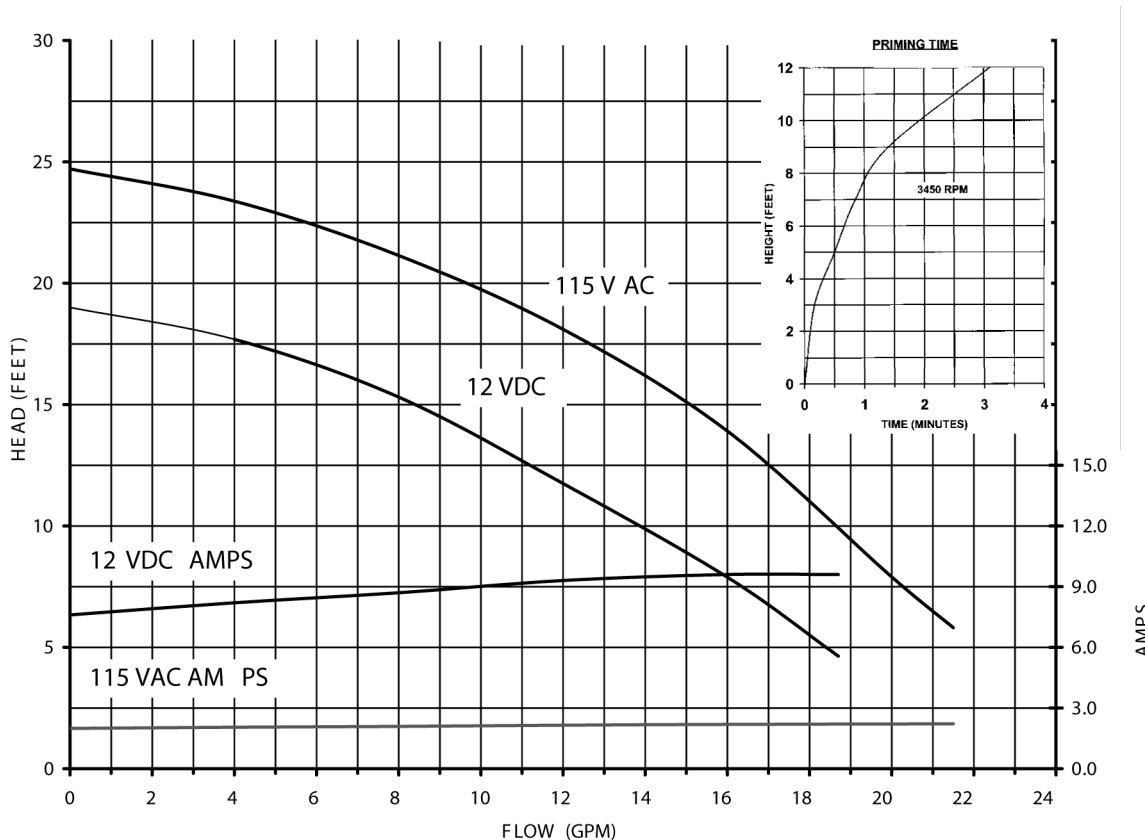

34800 BENNETT • FRASER, MI 48026-1686
 (586) 293-8240 • FAX (586) 293-8469
 (800) 563-8006 • www.mppumps.com

FRX 75-SP

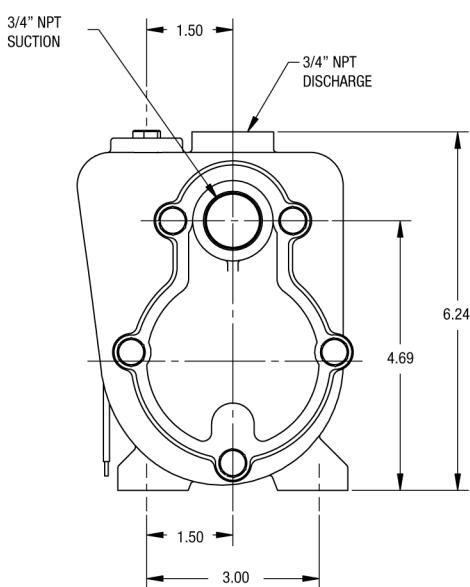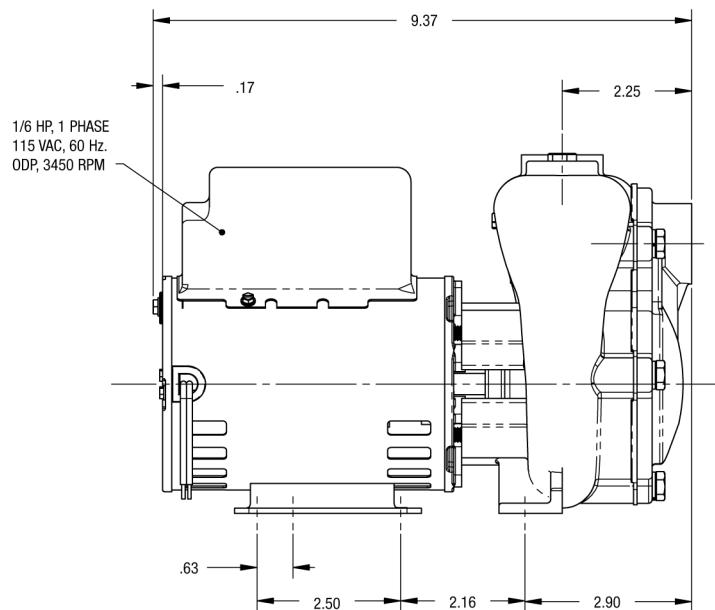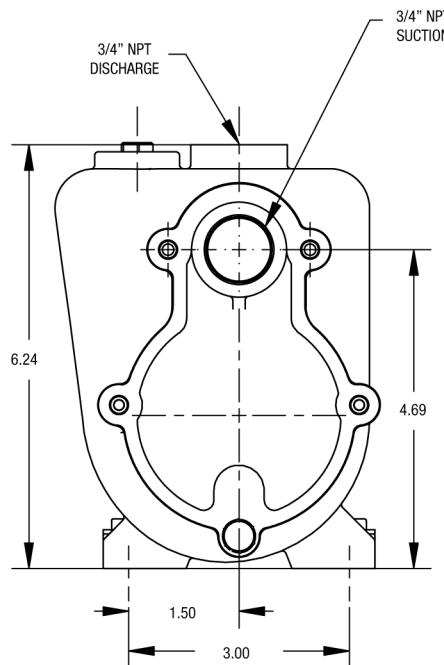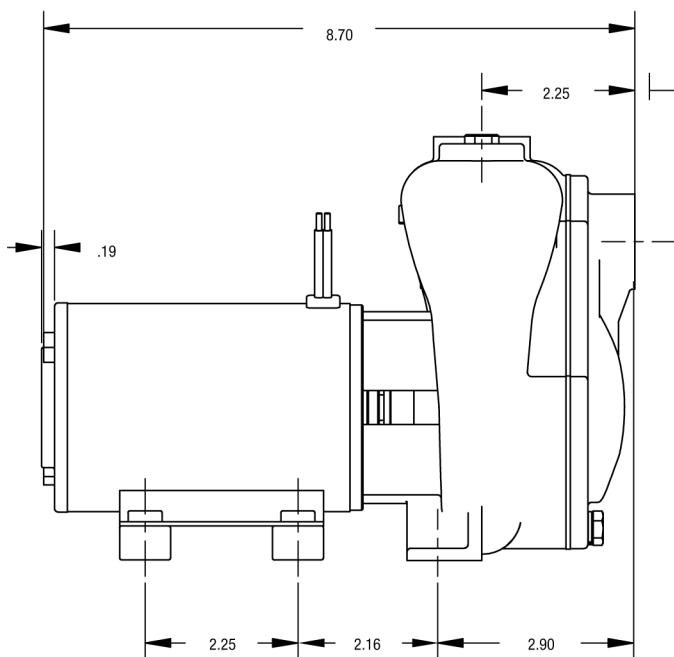

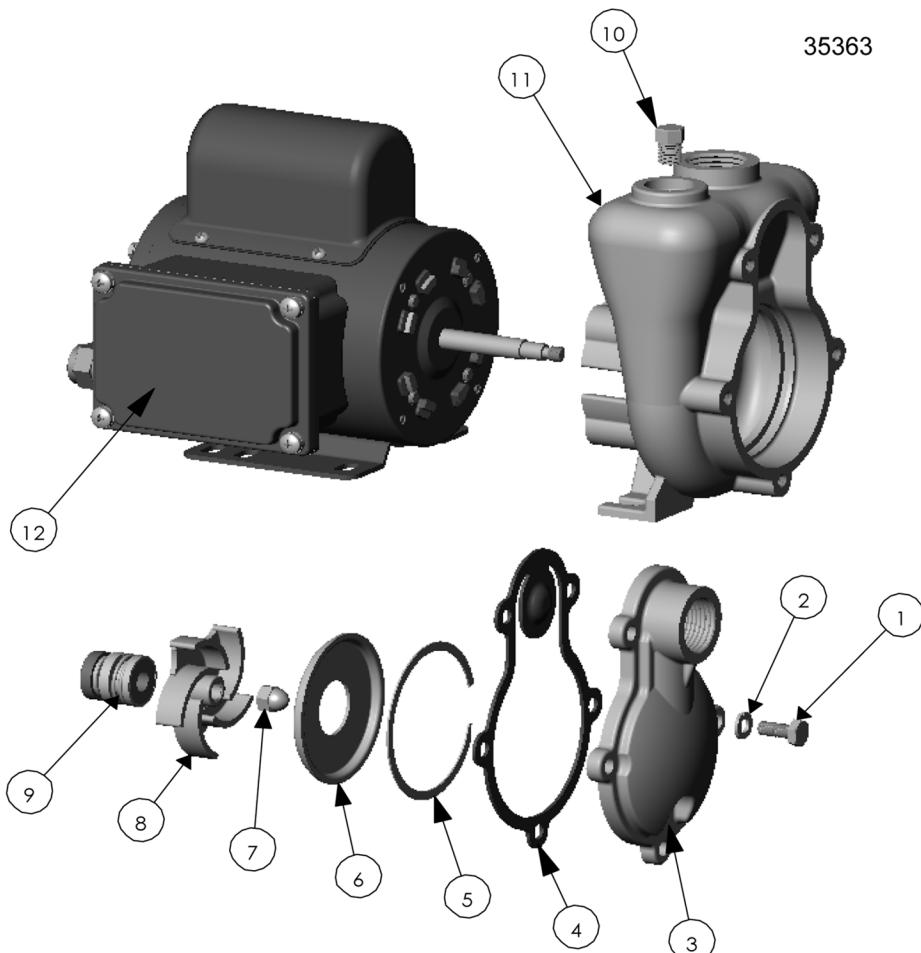

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	35039	CAPSCREW - 316 S.S. - 1/4-20 X 5/8	5
2	33564	LOCKWASHER - 316 S.S. - 1/4	5
3	35024	COVER - 316SS MACH.	1
*	4	35025 GASKET - VITON 90 DUROMETER	1
*	5	35027 RETAINING RING - 316SS	1
*	6	35026 WEAR PLATE - 316SS	1
*	7	28766 ACORN NUT - 316SS	1
*	8	34033 IMPELLER - 316SS	1
*	9	34038 MECHANICAL SEAL - VITON	1
10	21255	PIPE PLUG - 1/8" NPT 316SS	1
11	35022	HOUSING - 316SS MACH.	1
12	35342 34036 34992	EL. MOTOR- 115/230VAC, TENV EL. MOTOR- 12VDC, TENV EL. MOTOR- 24VDC, TENV	1

*- RECOMMENDED REPLACEMENT PARTS