




# ALH15

## 3 Lobes / Data Sheet

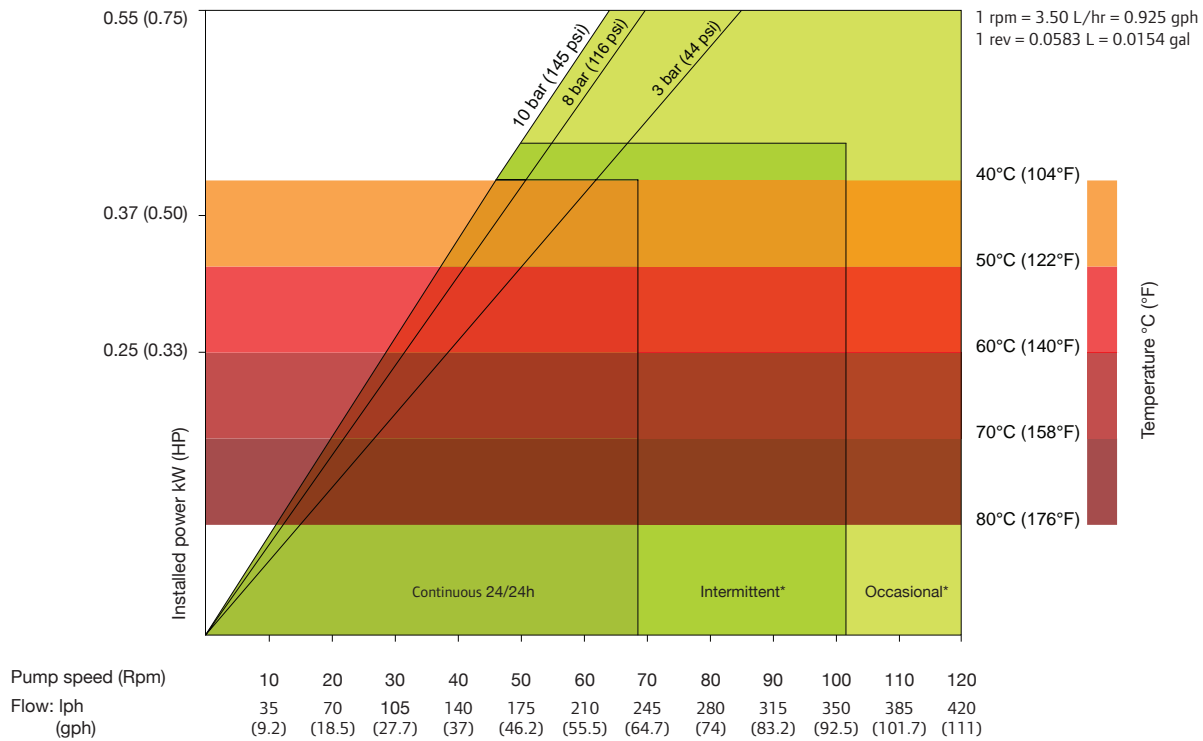


Lubricant Required: 0.55 L / 0.14 gal  
Assembly Weight: 35 kg / 77 lbs

\*Intermittent use : minimum one hour stop after 2 hours run / \*Occasional use : maximum one hour a day

### DIMENSIONS

mm (Inch)

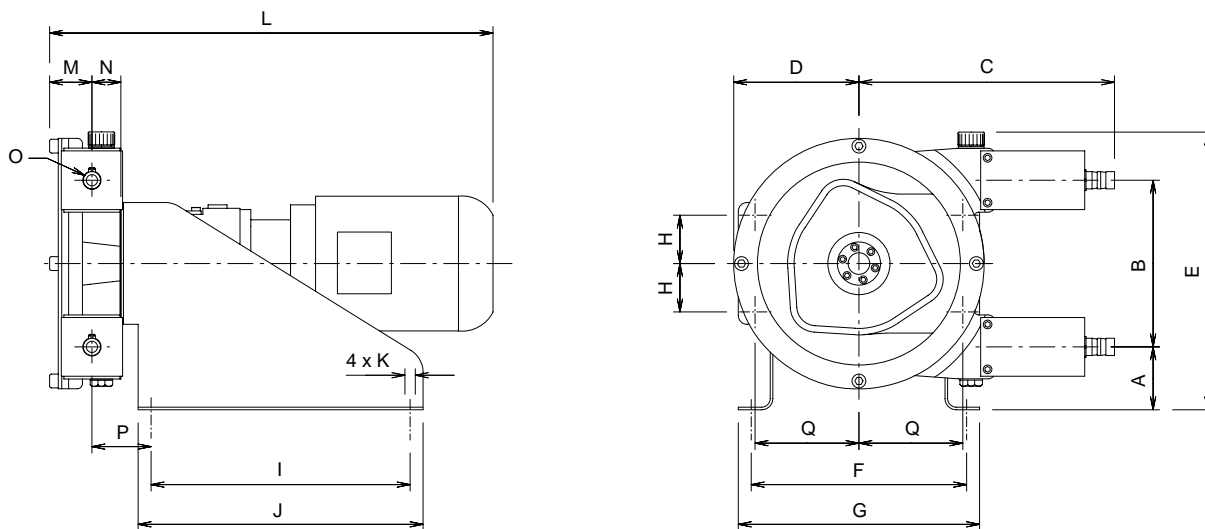


TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	ØO	P	Q
ALH15	73 (2.9)	193 (7.6)	297 (11.7)	145 (5.7)	325 (12.8)	249 (9.8)	280 (11.0)	52 (2.0)	300 (11.8)	330 (13.0)	4xø13 (4xø0.5)	-	46 (1.8)	35.5 (1.4)	20* (0.7)	70.5 (2.8)	124.8 (4.9)

\* Hose barb



# ALH15

## Data Sheet

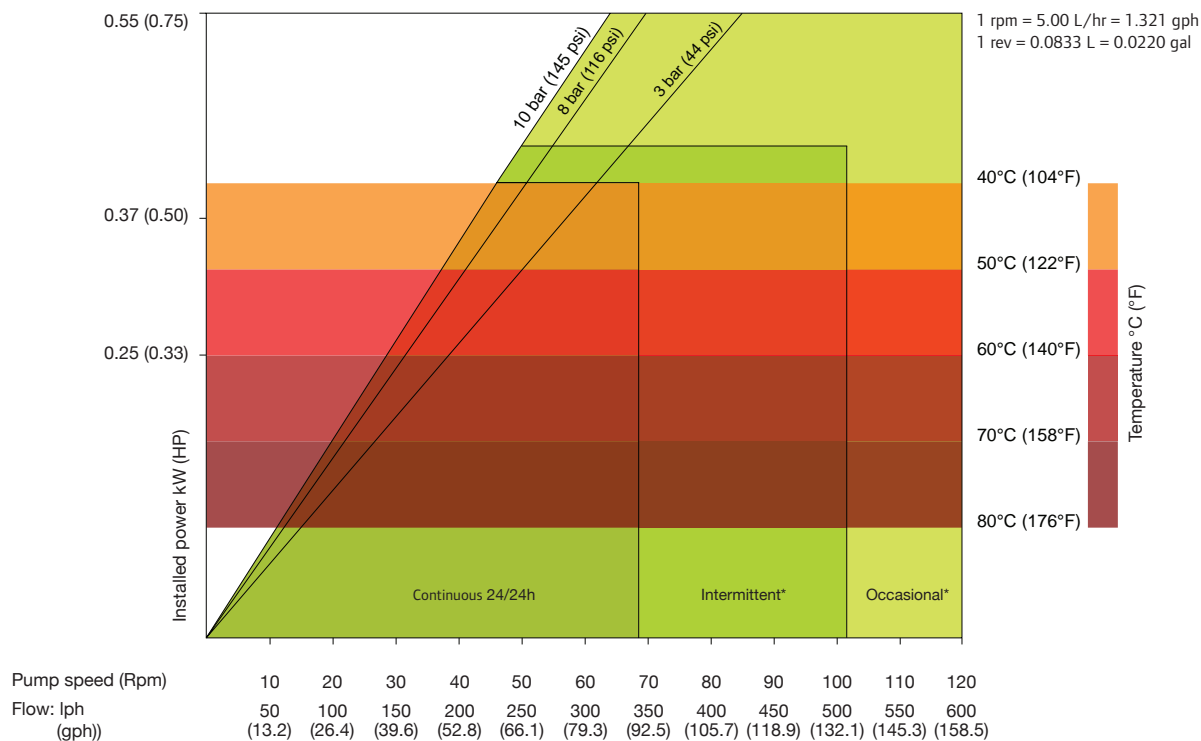


Lubricant Required: 0.55 L / 0.14 gal  
Assembly Weight: 35 kg / 77 lbs

\*Intermittent use : minimum one hour stop after 2 hours run / \*Occasional use : maximum one hour a day

### DIMENSIONS

mm (Inch)

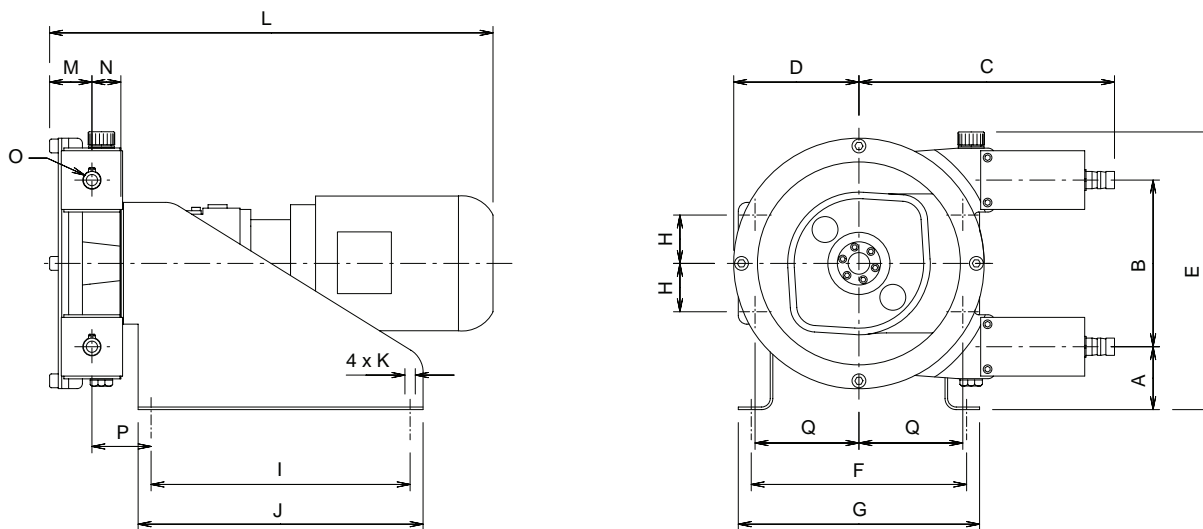

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	ØO	P	Q
ALH15	73 (2.9)	193 (7.6)	297 (11.7)	145 (5.7)	325 (12.8)	249 (9.8)	280 (11.0)	52 (2.0)	300 (11.8)	330 (13.0)	4xø13 (4xø0.5)	-	46 (1.8)	35.5 (1.4)	20* (0.7)	70.5 (2.8)	124.8 (4.9)

\* Hose barb