



eDYNAMiQ
 Eco, Dynamic and Integrated Quality

MODEL CB

Single Stage Double Suction
 Horizontal Split Case Pump



Features

- High Efficiency Impeller for Energy Savings
- Compact Design for Space Savings
- Shielded Bearings for Reduced Maintenance

eDYNAMiQ

Eco, Dynamic and Integrated Quality

Technical Data

Capacities: to 16,375 GPM (3719 m³/hr)

Head: to 492 ft (150m)

Power: 7.5 - 1,000 hp (5.5 - 750kW)

Working Pressure: 232 psi (16 BAR) Max

Temperature: 32 to 176 °F (0 to 80 °C)

Discharge Size: to 16 inch (400 mm)

Applications

Public Utilities

- Municipal Water Supply
- Irrigation
- Drainage

General Industrial Use

- Water Supply
- Process Cooling and Chilled Water
- Water Circulation
- Boiler Feed Water

Building Services

- Water Supply
- Air Conditioning


Performance Range




Detailed performance and technical data available at pumpsebara.com/products/CB-series/



CB 60HZ 4P USGPM - FT 20190527

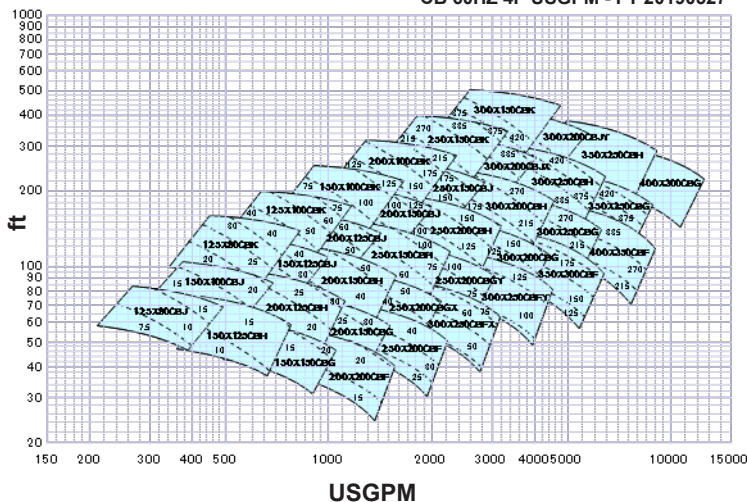

CB 60HZ 6P USGPM - FT 20200108

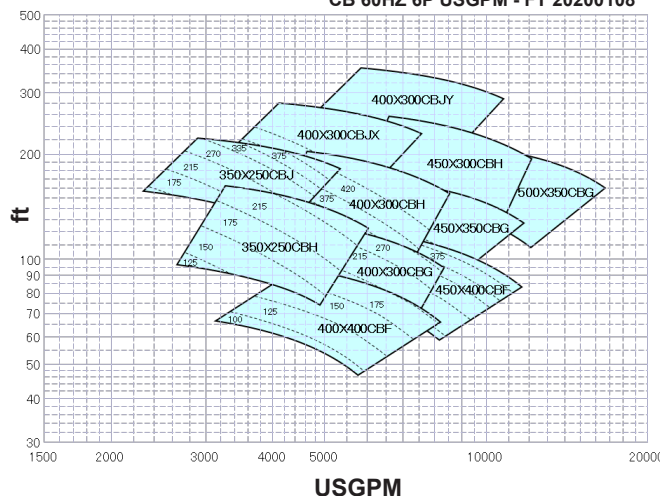

Illinois Location:

(847) 841-7867

860 Church Rd Elgin, IL 61

Minnesota Location:

(651) 758-7867

330 Mill Bay South Suite

Afton, MN 55001

PumpSupplyInc.com

