



EBARA

Ahead > Beyond

Model CDX / 2CDX

Stainless Steel Centrifugal Pump



PUMP SUPPLY
INCORPORATED



Model CDX / 2CDX

Features

- Close coupled design – saves space; simplifies maintenance and installation
- Stainless steel liquid end components – high quality; corrosion resistance
- Versatile mounting – can be installed horizontally or vertically
- Back pullout construction – allows for assembly and overhaul of the impeller and seal without distorting suction and discharge connections
- Top centerline discharge – ensures self-venting and reduces misalignment from pipe loads
- High operating efficiency – lowers operating costs
- High quality mechanical shaft seals and o-rings – available for standard pumping requirements
- Available with IP55 TEFC motors

Specifications


- Suction Size: 1 1/4" to 1 1/2" NPT Thread
- Discharge Size: 1" NPT Thread
- Power Range: 3/4 to 5 hp
- Capacity: 5 to 66 gpm
- Head: 40 to 255 feet
- Liquid: Clean Water

Applications

- Pressure Boosting
- Plant Services
- Liquid Transfer
- Pharmaceutical Services
- OEM Equipment Application

Performance Range

CDX

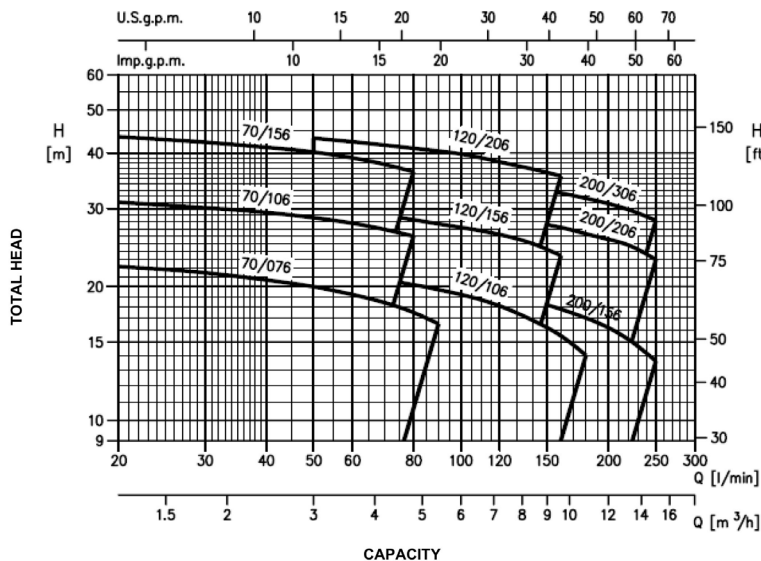

2CDX

