

EBARA



Submersible Sewage Pump

Model DLU



water | wastewater | drainage



EBARA Pumps Americas Corporation

Model DLU


Features

- **Air filled, Class F insulated, heavy duty motor, rated for 20 starts/hour,** dissipates heat easily, operates cooler with higher efficiencies; longer service life with lower operating costs
- **Built in motor protection with autocut** protects motor against overheat, out of phase, single phasing, and no load; saves money on costly motor replacement
- **Molded cable prevents capillary action,** reduces maintenance costs by replacing only the cable rather than the motor
- **60,000 hour bearings** ensure long dependable operation; lower maintenance costs
- **Large solids handling capabilities** prevents clogging
- **Semi-open impellers;** offer the best design for handling stringy and/or abrasive materials better due to large wear area and open passageways, providing durability and longer life
- High quality stainless steel shaft; provides high tensile strength, corrosion resistance, longer life, and lower maintenance costs
- **Double mechanical seals** – silicon carbide lower seals, carbon/ceramic upper - hard faced upper and lower seals operate in an oil bath; providing longer service life and lower maintenance costs
- **High wire to water efficiencies** - reduced power consumption, reduced cost of operation
- **Available for slide rail installations** provides ease of maintenance for small sump type installations

Standard Specifications

Design	Discharge	2, 3, 4 inch
	Horsepower	2 to 5 HP, Single Phase 1 to 2 HP, Three Phase
	Capacity	13 to 430 GPM
	Total head	9 to 66 feet
	Max.Liquid temp.	104°F/40°C
Speed	1800 RPM	
Materials	Casing	Cast Iron
	Impeller	Cast Iron
	Shaft	403 Stainless Steel
	Motor Frame	Cast Iron
	Fastener	304 Stainless Steel
Construction	Mechanical Seal	
	Double Mechanical Seal	
	Material – Upper	Carbon/Ceramic
	Material – Lower	Silicon Carbide/Silicon Carbide
	Impeller Type	Semi-open
	Bearing	Prelubricated Ball Bearing
	Motor	Air-filled, Insulation Class F
	Single Phase	208/230V
	Three Phase	208/230V, 460V
	Service Factor	1.15
Motor Protection	Built-in Auto cut - overload, out of phase, single phasing protection	
Submersible Cable	33 ft. standard cable length, Optional 66 ft.	
Accessories	Optional QDC System	

DLU selection chart

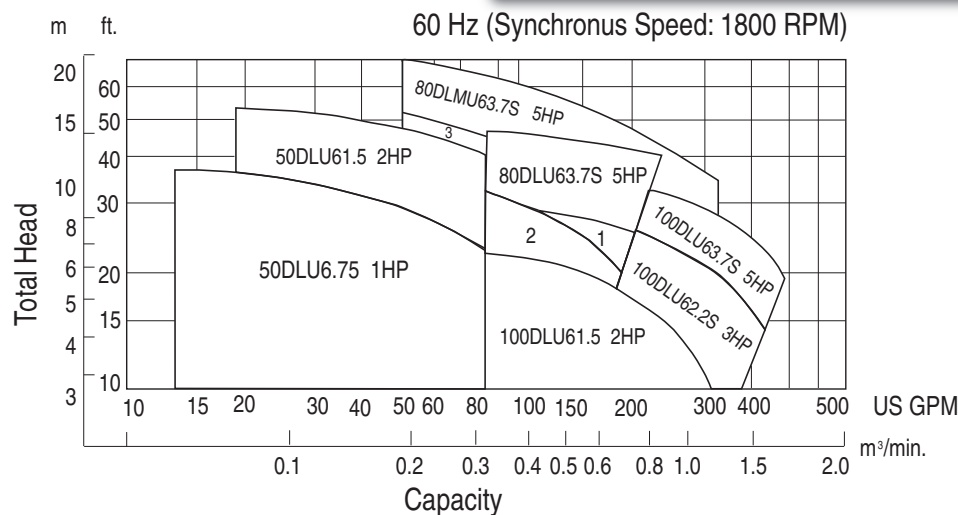

- 1 80DLU62.2S 3HP
- 2 80DLMU61.5 2HP
- 3 80DLMU62.2S 3HP

* All specifications subject to change without notice.



Illinois Location:
(847) 841-7867
1675 Todd Farm Dr.
Elgin, IL 60123



PUMP SUPPLY
INCORPORATED

Minnesota Location:
(651) 758-7867
330 Mill Bay South Suite 1511
Afton, MN 55001

EFHDLU0116