HYDRAULIC PERFORMANCE COVERAGE

4 Pole Motor

Capacity up to 1350 GPM (307 m3/h) | Head up to 165 feet (50 m) | Temperature to 500˚F (260˚C)
Pressure up to 375 PSIG (2586 kPa) | Effective static lift to 20 feet (6 m)

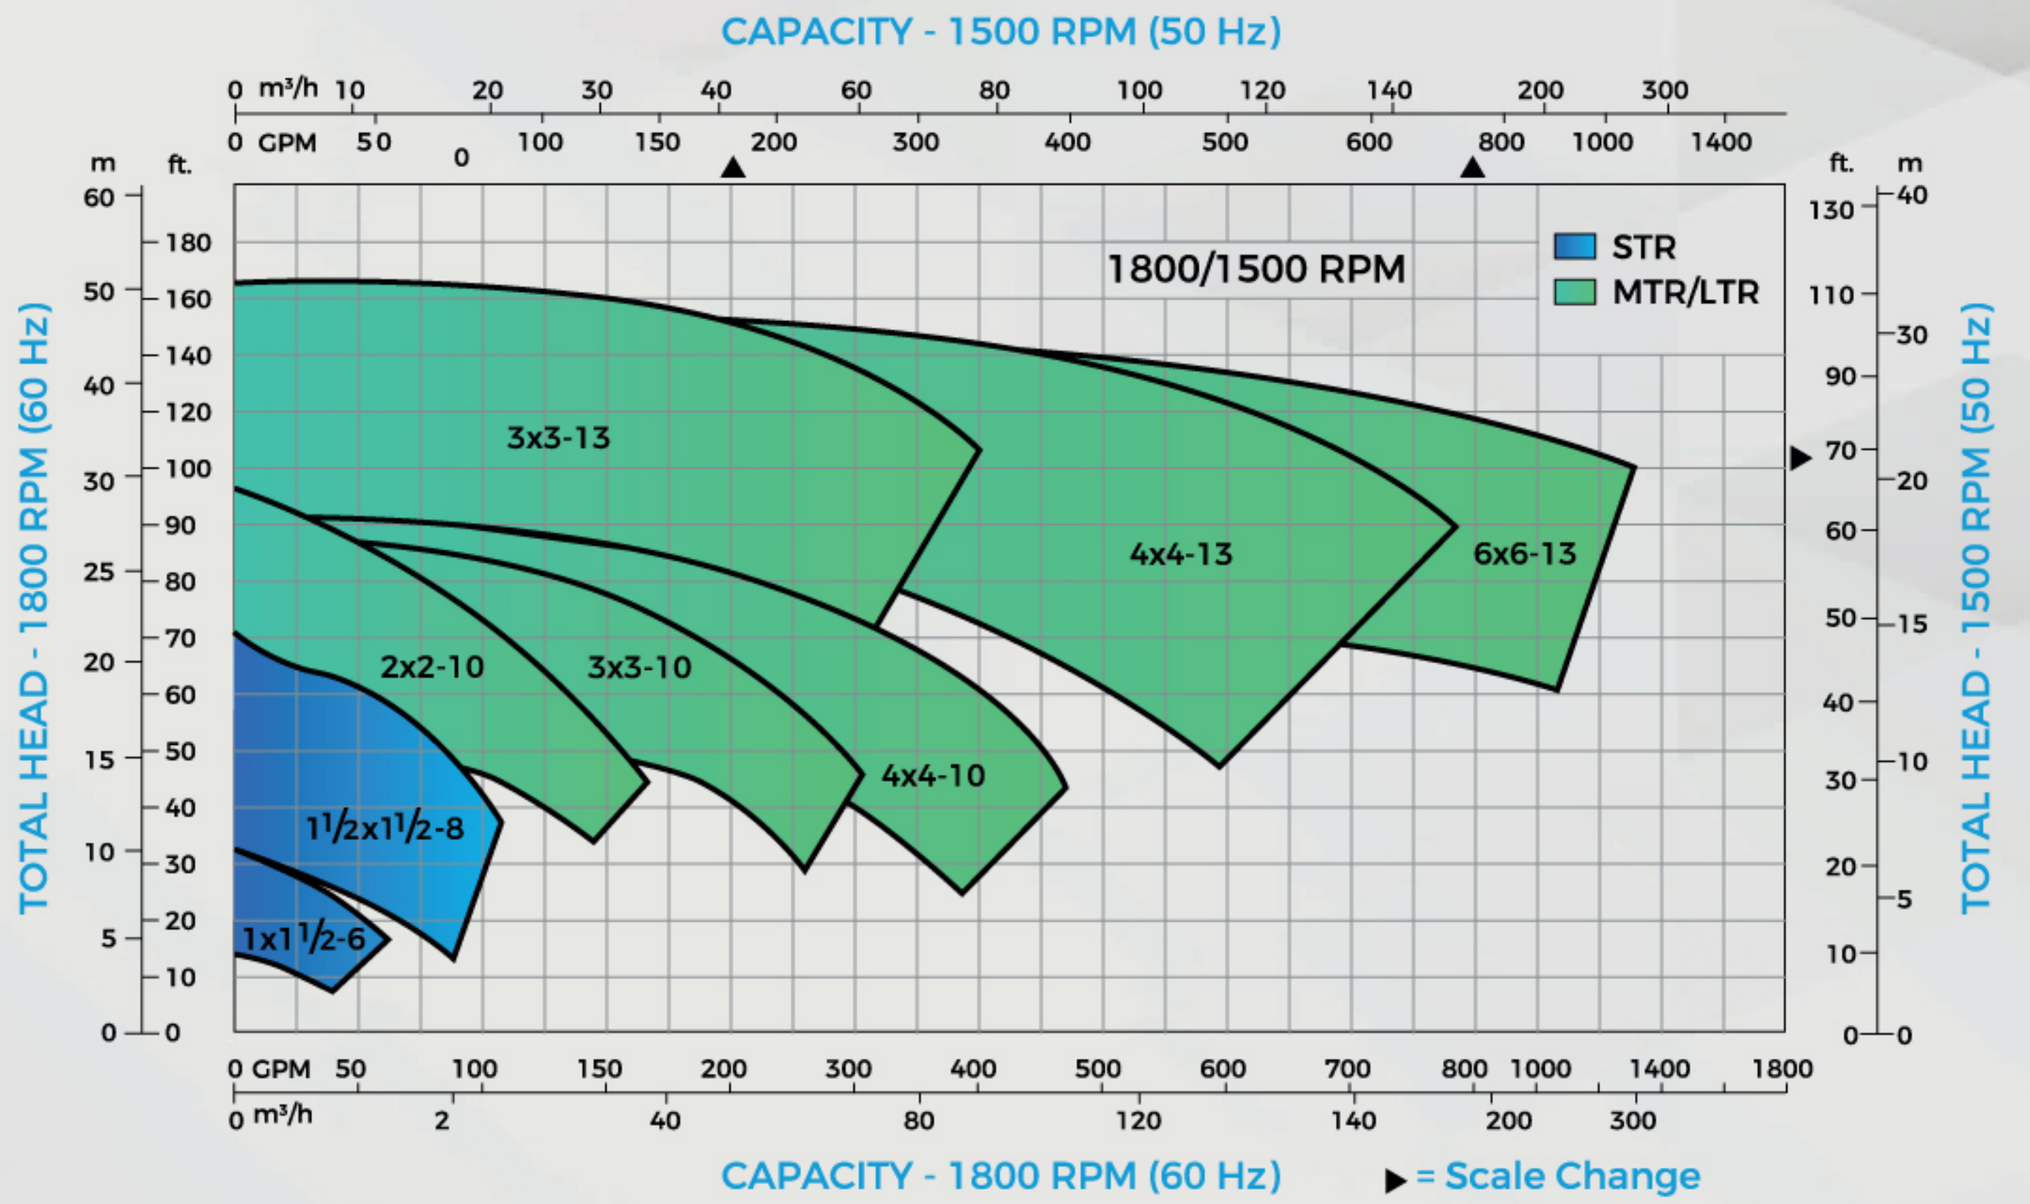

2 Pole Motor
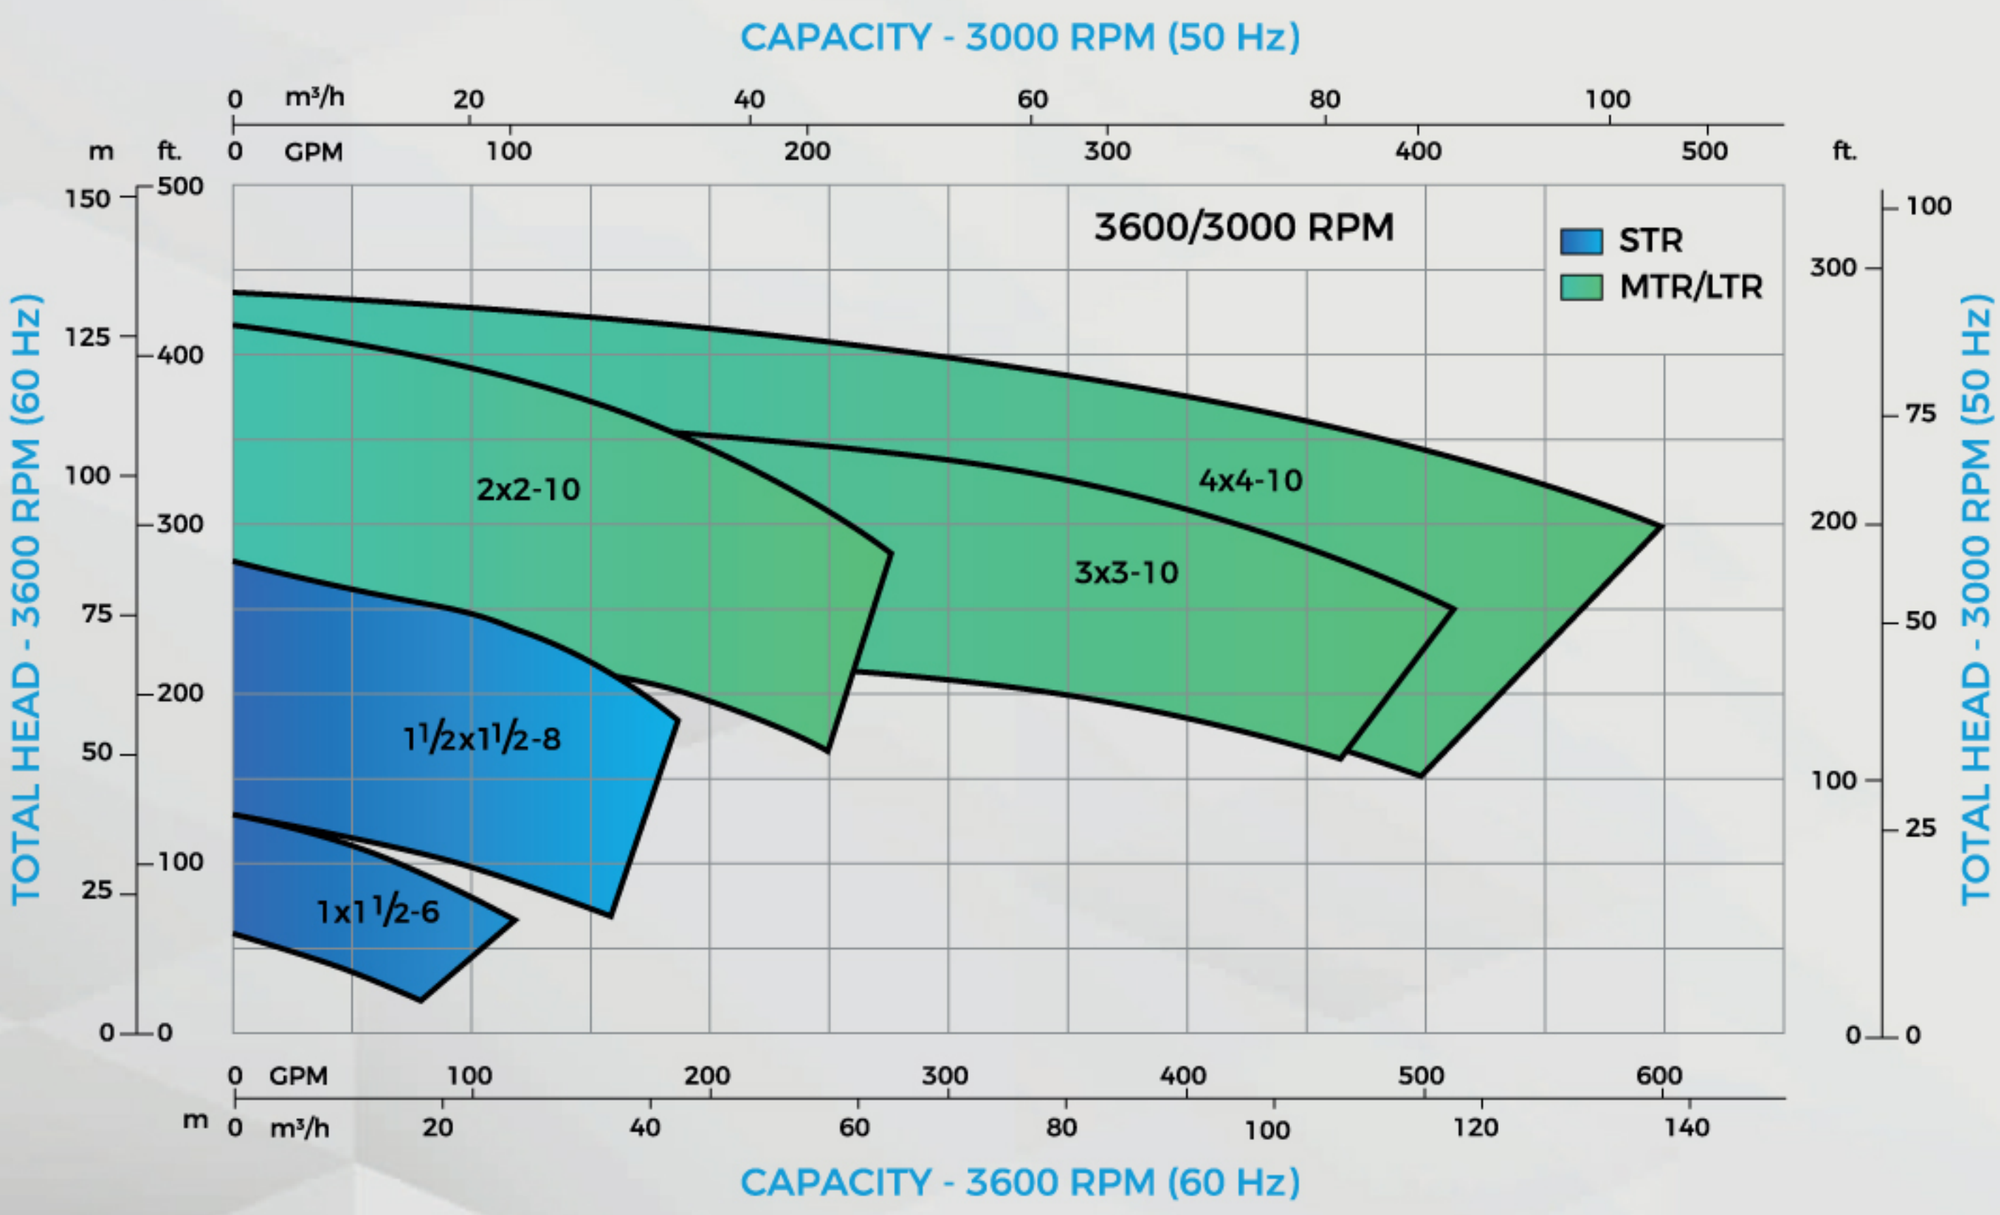
Capacity up to 600 GPM (136 m3/h) | Head up to 430 feet (131 m) | Temperature to 500˚F (260˚C)
Pressure up to 375 PSIG (2586 kPa) | Effective static lift to 20 feet (6 m)