


HYDRAULIC PERFORMANCE COVERAGE

With 4 Pole Motor

Capacity up to 6384 GPM (1450 m³/h) | Head up to 450 feet (137 m) | Temperature to 752° F (400° C)
Pressure to 362 PSIG (2500 kPa)

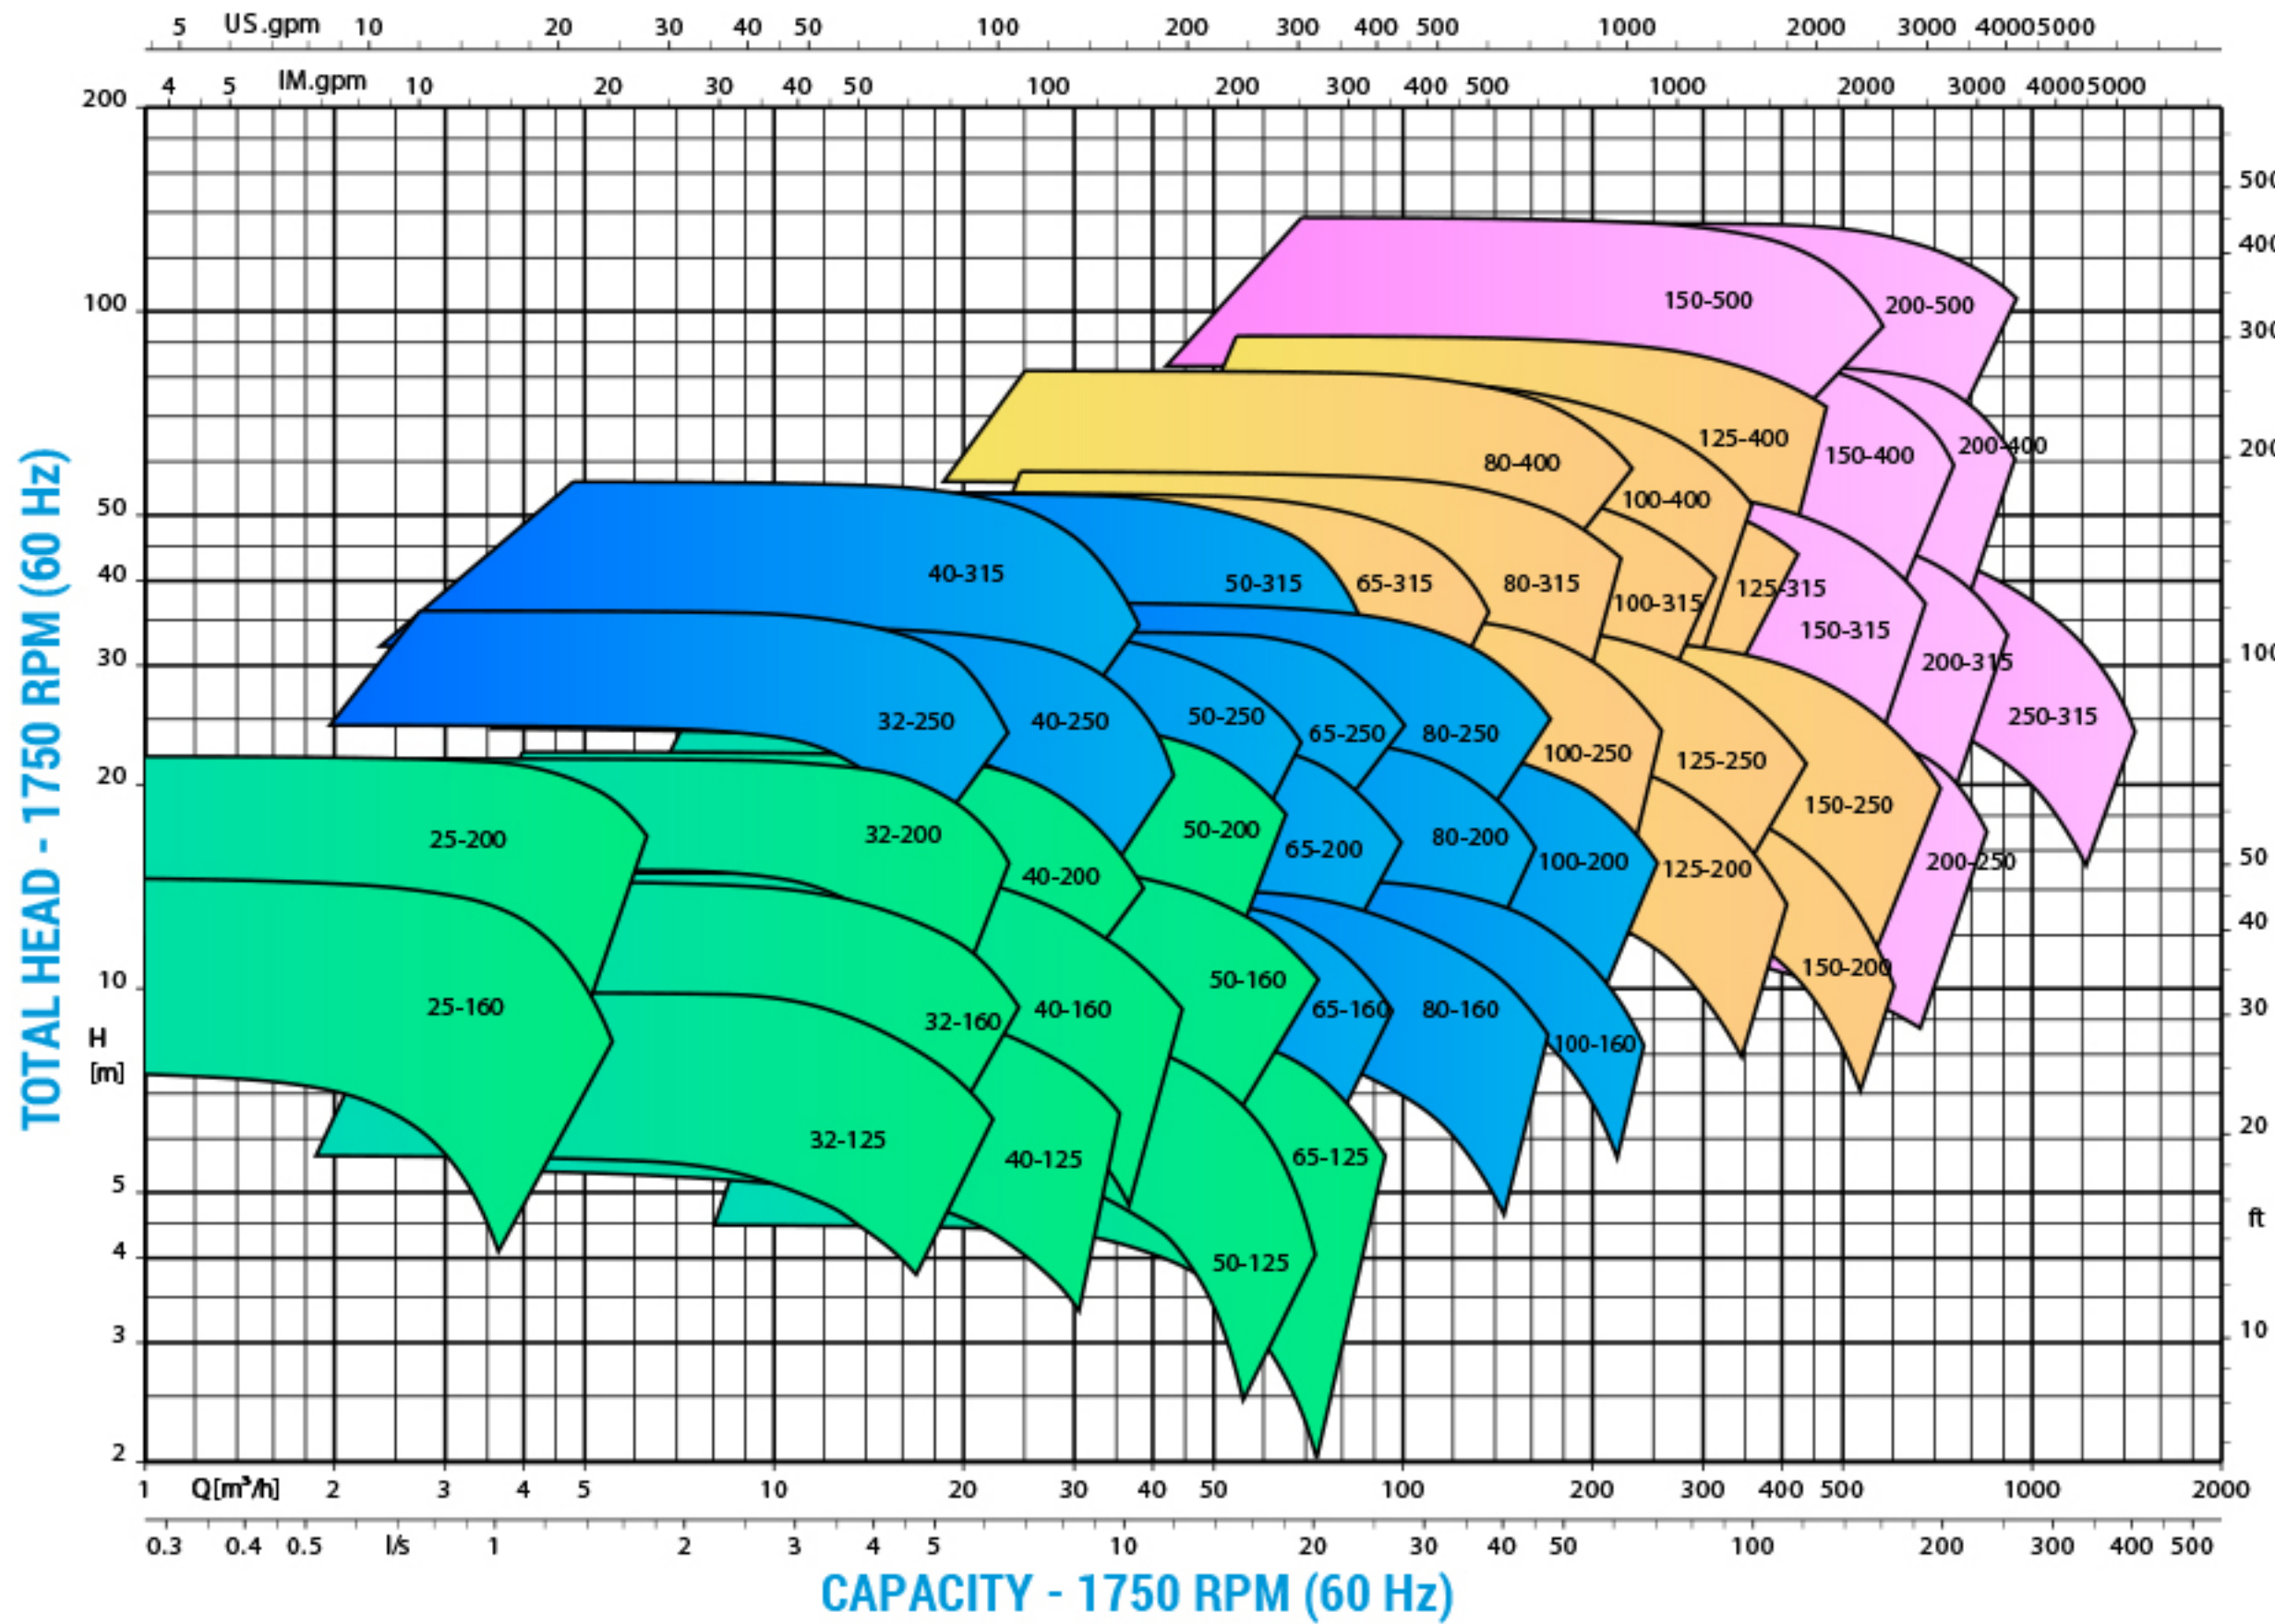

With 2 Pole Motor

Capacity up to 3300 GPM (750 m³/h) | Head up to 754 feet (230 m) | Temperature to 752° F (400° C)
Pressure to 362 PSIG (2500 kPa)

