




ALP

Characteristics / Technical Specifications




9 | CHARACTERISTICS AND TECHNICAL SPECIFICATIONS


9.1 - PERFORMANCE CURVES

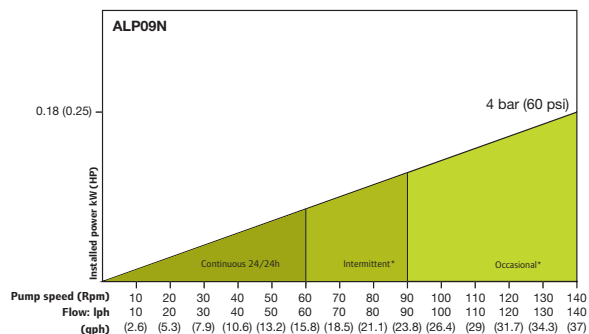


1 rpm = 1.000 L/hr = 0.2642 gph
 1 rev = 0.0167 L = 0.0044 gal
 Assembly Weight: 12 kg / 26 lbs

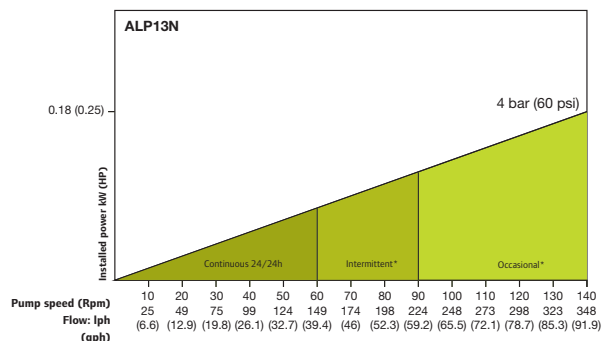


1 rpm = 2.483 L/hr = 0.6560 gph
 1 rev = 0.0414 L = 0.0109 gal
 Assembly Weight: 12 kg / 26 lbs

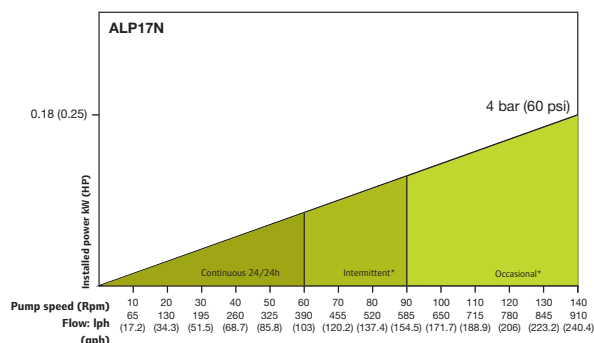


1 rpm = 6.500 L/hr = 1.7171 gph
 1 rev = 0.1083 L = 0.0286 gal
 Assembly Weight: 15 kg / 33 lbs

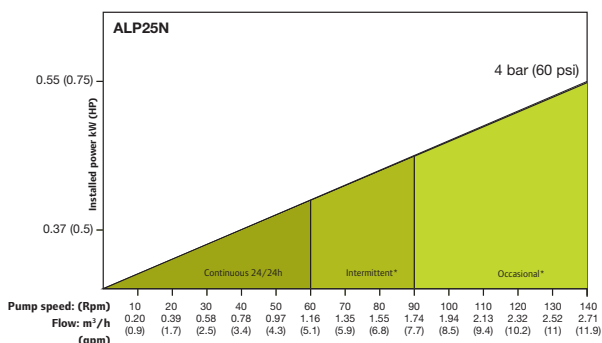

1 rpm = 0.0193 m³/hr = 0.0852 gpm
 1 rev = 0.3224 L = 0.0852 gal
 Assembly Weight: 55 kg / 121 lbs

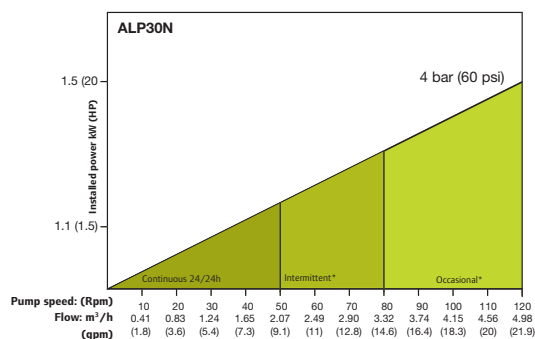

1 rpm = 0.0415 m³/hr = 0.1827 gpm
 1 rev = 0.6917 L = 0.1827 gal
 Assembly Weight: 95 kg / 209 lbs

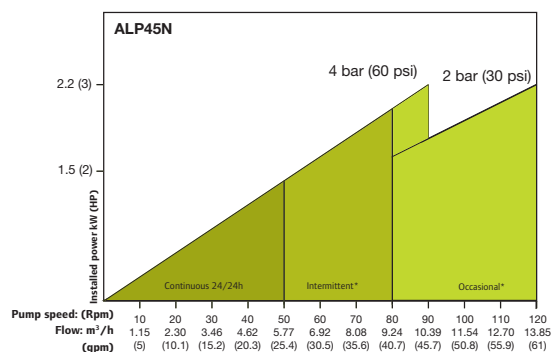

1 rpm = 0.1154 m³/hr = 0.5081 gpm
 1 rev = 1.9233 L = 0.5081 gal
 Assembly Weight: 155 kg / 342 lbs

*Intermittent use : minimum one hour stop after 2 hours run / *Occasional use : maximum one hour a day

*4 bar (60 psi) pressure limit is applicable when using a reinforced hose. The pressure limit when using extruded (non-reinforced) hoses is 2 bar (30 psi).