


mody ELECTRIC SUBMERSIBLE DRAINAGE PUMP

G-1002 SERIES 58HP @ 60Hz 37kW @ 50Hz

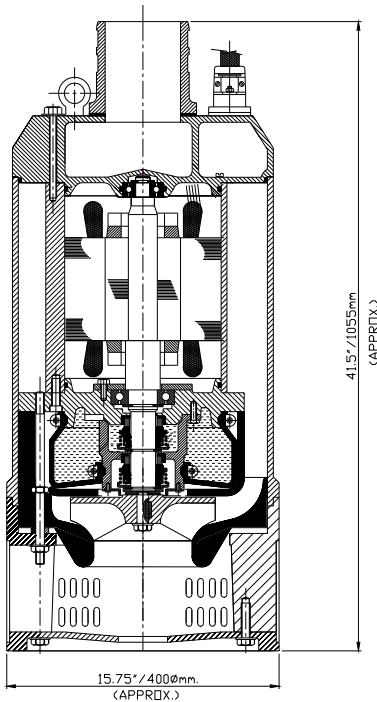

G-1002 SERIES

MATERIALS OF CONSTRUCTION AND ENGINEERING DATA

MOTOR

2-pole induction **continuous rated** motor with squirrel cage rotor.
 Stator insulation class 'H' (180°C)
 Speed : 3400 RPM @ 60 Hz, 2800 RPM @ 50 Hz
 Power Rating : 58HP @ 60 Hz, 37kW @ 50Hz Full Load
 Current FLA: 64 Amps @ 460v. 62 Amps @ 400v.
 Max. temperature of the pump liquid : 104°F/40°C
 Max. start/stop per hour : 15
 Star - Delta Starting Optional

POWER SUPPLY

3 phase, 50/60 Hz, AC Supply. Available in any voltage frequency combination. (380/415/460/575/1000V)

BALL BEARINGS

Single row deep groove upper bearing. Double angular contact lower bearings. The bearings are enclosed with high temperature grease-containing special Anti-corrosion additive.

POWER CABLE

Waterproof/oil proof, rubber-insulated, neoprene-sheathed copper conductor flexible cable, 50ft. (15m) length standard. Type SOOW in North America, EPR in the Middle East and HO7RN in the EU. 6 Core or Control cable with thermal overloads optional.

SHAFT SEAL

Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide Mechanical seals wholly enclosed in a pressure compensated oil chamber.

CORROSION RESISTANT

Epoxy coated Steel Outer Casing
 Aluminum Stator Casing
 Nitrile Rubber- Lined Diffuser/Wear plate.
 Shaft: 431 Stainless Steel
 Hardware: 304 Stainless Steel
 Impeller: Nitride Hardened 410SS to 56HRC is Standard.
 pH Range 5 - 8

STRAINER

304 Stainless Steel with 1-9/16" (25.5mm) X 3/8" (10mm)

SUBMERGENCE



Submergence below liquid surface min 5" (127mm) max. 50' (15m).

WEIGHTS (Approx. without cable)

G 1002: 545lbs. (248Kg)

PERFORMANCE CURVE

MODEL: G 1002T (50/60 Hz)

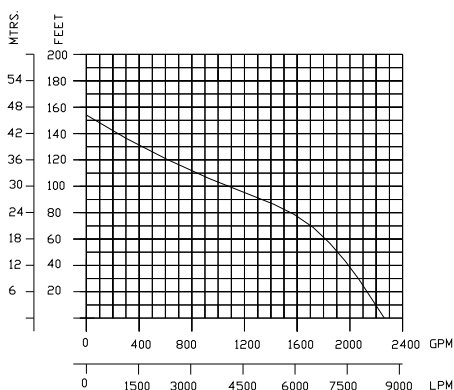

Due to continuous product development, specifications are subject to change without notice.

03.10.Rev.0