




# mody ELECTRIC SUBMERSIBLE DRAINAGE PUMP

## M-900 SERIES 35HP (26kW)

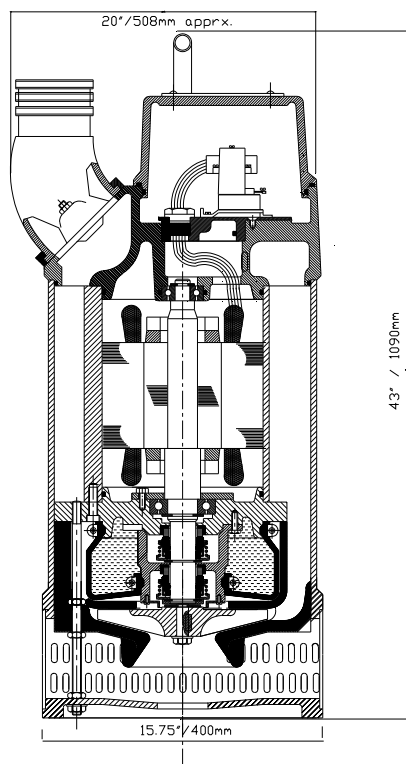

## M-900 SERIES

### MATERIALS OF CONSTRUCTION AND ENGINEERING DATA

#### MOTOR

2-pole induction **continuous rated** motor with squirrel cage rotor.  
 Stator insulation class 'H' (180°C)  
 Speed : 3400 RPM @ 60 Hz, 2800 RPM @ 50 Hz  
 Power Rating : 35HP @ 60 Hz, 26kW @ 50Hz Full Load  
 Current FLA: 44 Amps @ 460v. 51 Amps @ 400v.  
 Max. temperature of the pump liquid : 104°F/40°C  
 Max. start/stop per hour : 15  
 Star - Delta Starting Optional

#### POWER SUPPLY

3 phase, 50/60 Hz, AC Supply. Available in any voltage frequency combination. (380/415/460/575/1000V)

#### BALL BEARINGS

Single row deep groove upper bearing. Double angular contact lower bearings. The bearings are enclosed with high temperature grease-containing special Anti-corrosion additive.

#### POWER CABLE

Waterproof/oil proof, rubber-insulated, neoprene-sheathed copper conductor flexible cable, 50ft. (15m) length standard. Type SOOW in North America, EPR in the Middle East and HO7RN in the EU.

#### SHAFT SEAL

Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide Mechanical seals wholly enclosed in a pressure compensated oil chamber.

#### CORROSION RESISTANT

Epoxy coated Steel Outer Casing  
 Epoxy coated Aluminum Stator Casing  
 Nitrile Rubber- Lined Diffuser/Wear plate.  
 Shaft: 431 Stainless Steel  
 Hardware: 304 Stainless Steel  
 Impeller: Nitride Hardened 410SS to 56HRC is Standard.  
 pH Range 5 - 8

#### STRAINER

304 Stainless Steel with 1-9/16" (25.5mm) X 3/8" (10mm) {M 902}, 3/8" (10mm) Round Holes {M 906}

#### SUBMERGENCE

Submergence below liquid surface min 5" (127mm) max. 50' (15m).


#### WEIGHTS (Approx. without cable)

M 902: 525lbs. (239Kg)  
 M 906: 540lbs. (245Kg)



### PERFORMANCE CURVES

MODEL: M902T/M906T (50/60 Hz)

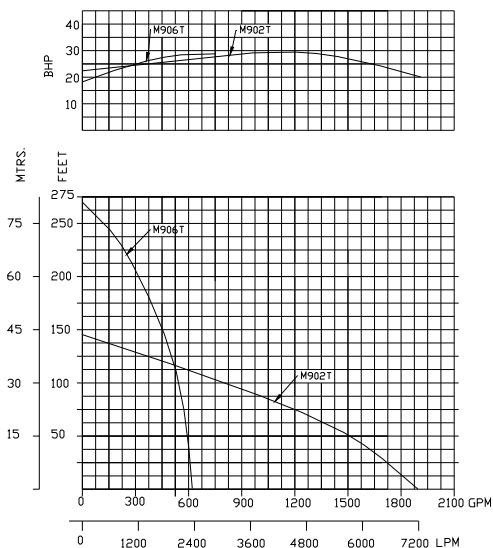

Due to continuous product development, specifications are subject to change without notice.

03.10.Rev.0