

1:1
2"

61204X-X Series Pumps



Illinois Location:

(847) 841-7867


860 Church Rd Elgin, IL 60123

Minnesota Location:

(651) 758-7867

330 Mill Bay South Suite 1511 Afton, MN 55001

PumpSupplyInc.com

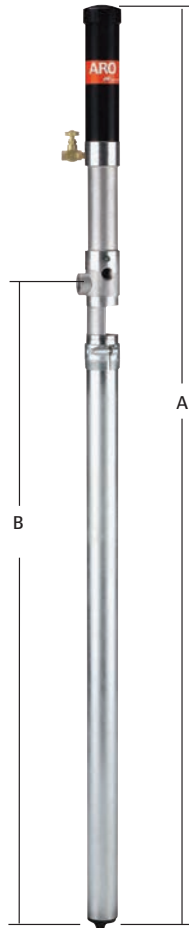



Materials: Oils, Light fluids

Pump Specifications

Ratio	1:1
Stroke in (mm)	6 (15.2)
Material Inlet	Immersed
Material Outlet	3/4" NPT(F)
Air Inlet (female)	1/4" NPT(F)
Air Inlet Pressure Range psi (bar)	0-150 (0-10.3)
Fluid Pressure Range psi (bar)	0-150 (0-10.3)
Max Cycles/Minute	75
Displacement/Cycle cu in (cm3)	18.8 (308)
Volume/Cycle oz (ml)	10.4 (307.7)
Cycles/gal (L)	12.3 (3.3)
Flow @ 75 Cycles gpm (L/min)	6.0 (22.7)
Noise Level @ 60 psi dBA	77.8
Weight* lb (kg)	612041-1, 612401-3 13 (5.9) 612402-1 14 (6.4)

*Estimated weight. Contact Technical Support for exact weight.

DIMENSIONS	A in (mm)	B in (mm)
612041-X	54 (1371.6)	34.625 (879.5)
612042-X	64.25 (1631.9)	44.875 (1139.8)

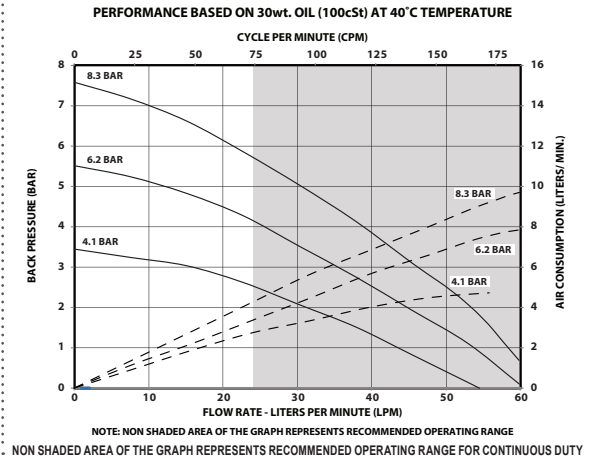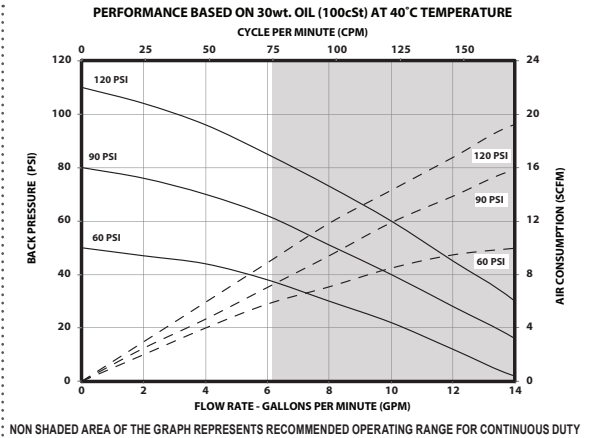

Pump Model	Container Suitability	Type	Plunger Material	Upper Packings	Lower Packings	Pump Service Kit
Lower Pump Material - Carbon Steel						
612041-1	55 Gallon (208.2 L)	Wall mount or drum	Carbon Steel	Nitrile	Nitrile	637081
612041-3	55 Gallon (208.2 L)	Wall mount or drum	Carbon Steel	PTFE	PTFE	637083
612042-1	275 Gallon (1041 L)	Wall mount or drum	Carbon Steel	Nitrile	Nitrile	637081

*Lower pump repair kit

Recommended Accessories

61879 Muffler	635040 ARO-Stop Valve	61113 Wall Mount Bracket	C38121-600 Air FRL	637084 Air Motor Service Kit