



FRX 100

1" x 1" End Suction Centrifugal Pump

The FRX 100 316 stainless steel centrifugal pump is ideal for hard-to-handle applications in the marine, commercial, and industrial markets.

All wetted components are 316 investment cast stainless steel providing superior corrosion resistance when pumping chemical compounds. A carbon / ceramic / Viton bellows shaft seal is standard with optional seals available on request. The FRX 100 model is available with 1" NPT port configurations. Pump rotation in 90° increments.

SPECIFICATIONS:

Suction and Discharge . . . 1" NPT x 1" NPT

Materials of Construction 316 stainless steel

Flow Up to 40 GPM

Head Feet Up to 54'

Impeller 3.75" 316 stainless steel

Drive Options Close coupled 115V AC

 Close coupled 12V DC


 Close coupled 230V AC

 Close coupled 24V DC

 Close coupled 32V DC

Seal Carbon / ceramic / Viton bellows 150 PSI


 Special seals upon request

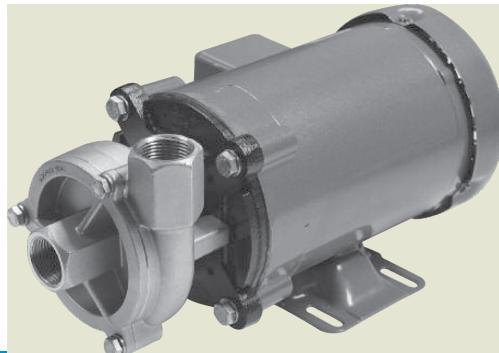

Application:



- Agricultural
- Commercial
- Industrial
- Marine


FRX 100

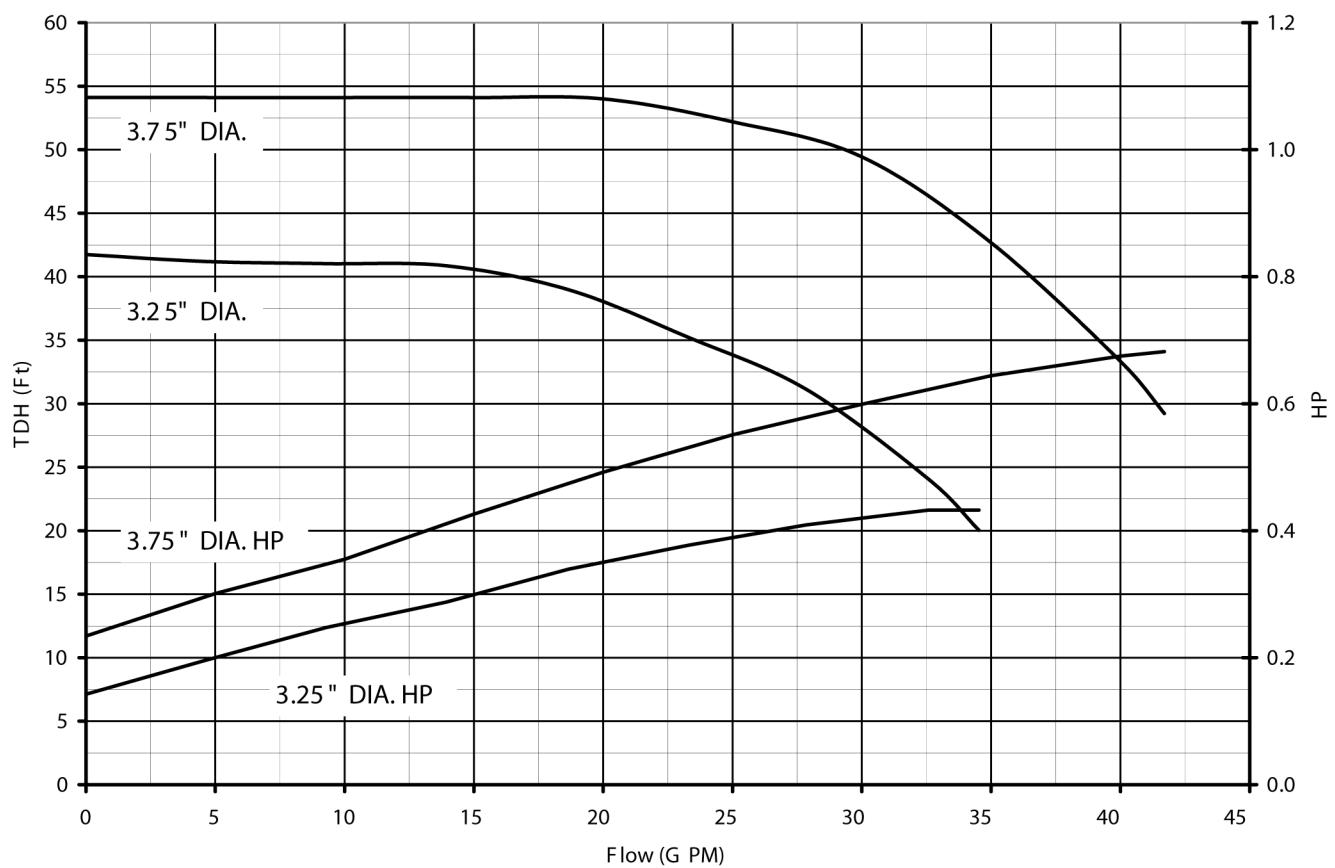

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com

FRX 100

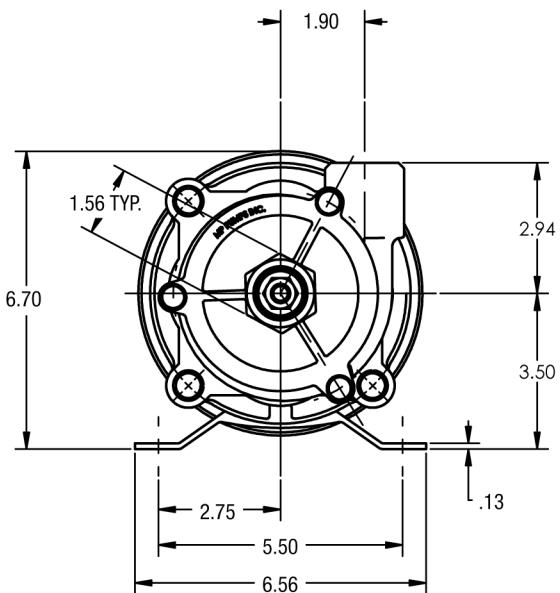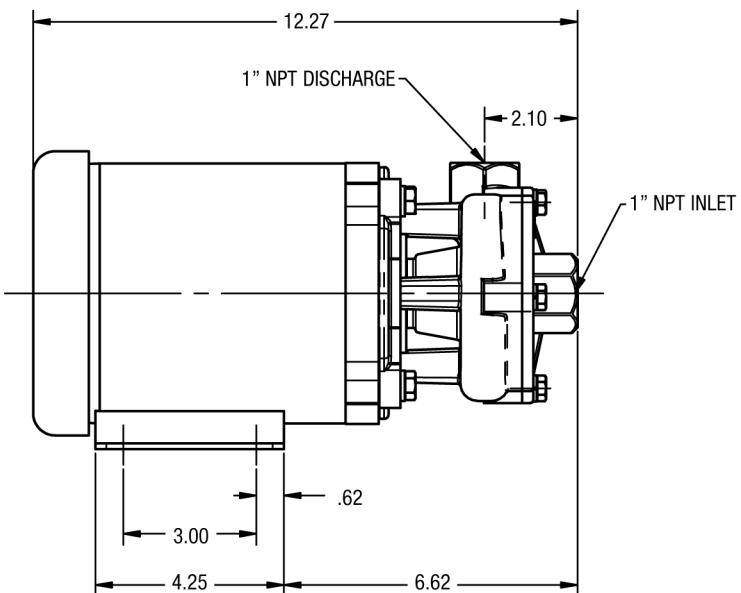

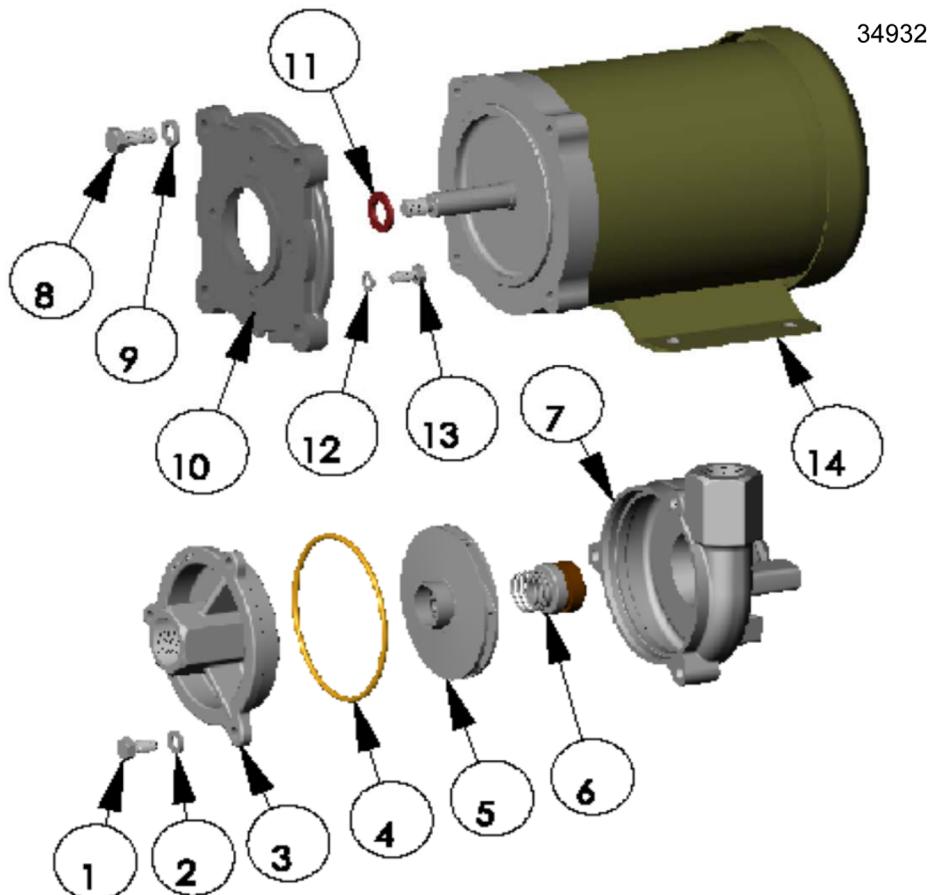

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	34930	CAPSCREW - S.S. - 5/16-18 X 5/8	3
2	21238	LOCKWASHER - S.S. - 5/16	3
*	3	COVER - 316 S.S.	1
*	4	O-RING - VITON	1
*	5	IMPELLER - 316 S.S. - 3.75 DIA.	1
*	6	SEAL - VITON	1
*	7	HOUSING - 316 S.S.	1
8	21251	HEXHEAD CAPSCREW - S.S. - 3/8-16 X 7/8	4
9	21266	LOCKWASHER - S.S. - 3/8	4
*	10	ADAPTER RING - 56C	1
11	21435	SLINGER - NEO. - 1 X .6	1
12	33564	LOCKWASHER - S.S. - 1/4	4
13	21504	HEXHEAD CAPSCREW - S.S. - 1/4-20 X 5/8	4
14	35035	EL. MTR. - 56J TEFC	1

*- RECOMMENDED REPLACEMENT PARTS